



U.S. AIDS TO NAVIGATION SYSTEM

on navigable waters except Western Rivers

LATERAL SYSTEM AS SEEN ENTERING FROM SEAWARD

PORT SIDE ODD NUMBERED AIDS	PREFERRED CHANNEL NO NUMBERS--MAY BE LETTERED	PREFERRED CHANNEL NO NUMBERS--MAY BE LETTERED	STARBOARD SIDE EVEN NUMBERED AIDS
<p>GREEN LIGHT ONLY</p> <p>FLASHING (2) </p> <p>FLASHING </p> <p>OCCULTING </p> <p>QUICK FLASHING </p> <p>ISO </p>	<p>PREFERRED CHANNEL TO STARBOARD TOPMOST BAND GREEN</p> <p>GREEN LIGHT ONLY</p> <p>COMPOSITE GROUP FLASHING (2+1) </p>	<p>PREFERRED CHANNEL TO PORT TOPMOST BAND RED</p> <p>RED LIGHT ONLY</p> <p>COMPOSITE GROUP FLASHING (2+1) </p>	<p>RED LIGHT ONLY</p> <p>FLASHING (2) </p> <p>FLASHING </p> <p>OCCULTING </p> <p>QUICK FLASHING </p> <p>ISO </p>
<p>1</p> <p>LIGHT </p> <p>*1* FI G 6s</p> <p>9</p> <p>LIGHTED BUOY </p> <p>G "9" FI G 4s</p>	<p>A</p> <p>LIGHTED BUOY </p> <p>GR "A" FI (2+1) G 6s</p>	<p>B</p> <p>LIGHTED BUOY </p> <p>RG "B" FI (2+1) R 6s</p>	<p>2</p> <p>LIGHT </p> <p>*2* FI R 6s</p> <p>8</p> <p>LIGHTED BUOY </p> <p>R "8" FI R 4s</p>
<p>9</p> <p>CAN </p> <p>G "9" C "9"</p> <p>5</p> <p>DAYBEACON </p> <p>G "5" C "5"</p>	<p>U</p> <p>CAN </p> <p>GR "U"</p> <p>S</p> <p>CAN </p> <p>GR "S" C "S"</p>	<p>C</p> <p>NUN </p> <p>RG "C" N "C"</p> <p>G</p> <p>NUN </p> <p>RG "G" N "G"</p>	<p>6</p> <p>NUN </p> <p>R "6" N "6"</p> <p>2</p> <p>DAYBEACON </p> <p>R "2" N "2"</p>

AIDS TO NAVIGATION HAVING NO LATERAL SIGNIFICANCE

ISOLATED DANGER NO NUMBERS--MAY BE LETTERED	SAFE WATER NO NUMBERS--MAY BE LETTERED
<p>WHITE LIGHT ONLY</p> <p>FI (2) 5s </p> <p>A</p> <p>LIGHTED AND/OR SOUND </p> <p>BR "A" FI (2) 5s</p> <p>C</p> <p>UNLIGHTED AND/OR SOUND </p> <p>BR "C"</p>	<p>WHITE LIGHT ONLY MORSE CODE</p> <p>Mo (A) </p> <p>A</p> <p>LIGHTED AND/OR SOUND </p> <p>RW "N" Mo (A)</p> <p>MR </p> <p>RW "A"</p> <p>B</p> <p>SPHERICAL </p> <p>RW "SP" "B"</p> <p>N</p> <p>UNLIGHTED AND/OR SOUND </p> <p>RW "N"</p>
<p>RANGE DAYBOARDS--MAY BE LETTERED</p> <p>KGW KWG KWB KBW KWR KRW KRB KBR KGB KBG KGR KRG</p>	

DAYBOARDS--MAY BE LETTERED

WHITE LIGHT ONLY

NR

NG

NB

RW Bn

GW Bn

BW Bn

TYPICAL INFORMATION AND REGULATORY MARKS

INFORMATION AND REGULATORY MARKERS
WHEN LIGHTED, INFORMATION AND REGULATORY MARKS MAY DISPLAY ANY LIGHT RHYTHM EXCEPT QUICK FLASHING AND FLASHING (2)

WHITE LIGHT ONLY

NW

W Bn

DANGER

EXCLUSION AREA

RESTRICTED OPERATIONS

DANGER

5

SPECIAL MARKS--MAY BE LETTERED

YELLOW LIGHT ONLY

FIXED FLASHING

A

UNLIGHTED

Y "A"
C "A"

C

UNLIGHTED

Y "C"
N "C"

A

UNLIGHTED

Y "A"
Bn



SHAPE OPTIONAL--BUT SELECTED TO BE APPROPRIATE FOR THE POSITION OF THE MARK IN RELATION TO THE NAVIGABLE WATERWAY AND THE DIRECTION OF BUOYAGE.

B

LIGHTED

Y "B"
FI

Aids to navigation marking the Intercoastal Waterway (ICW) display unique yellow symbols to distinguish them from aids marking other waters. Yellow triangles indicate aids should be passed by keeping them on the starboard (right) hand of the vessel. Yellow squares indicate aids should be passed by keeping them on the port (left) hand of the vessel. A yellow horizontal band provides no lateral information, but simply identifies aids as marking the ICW.

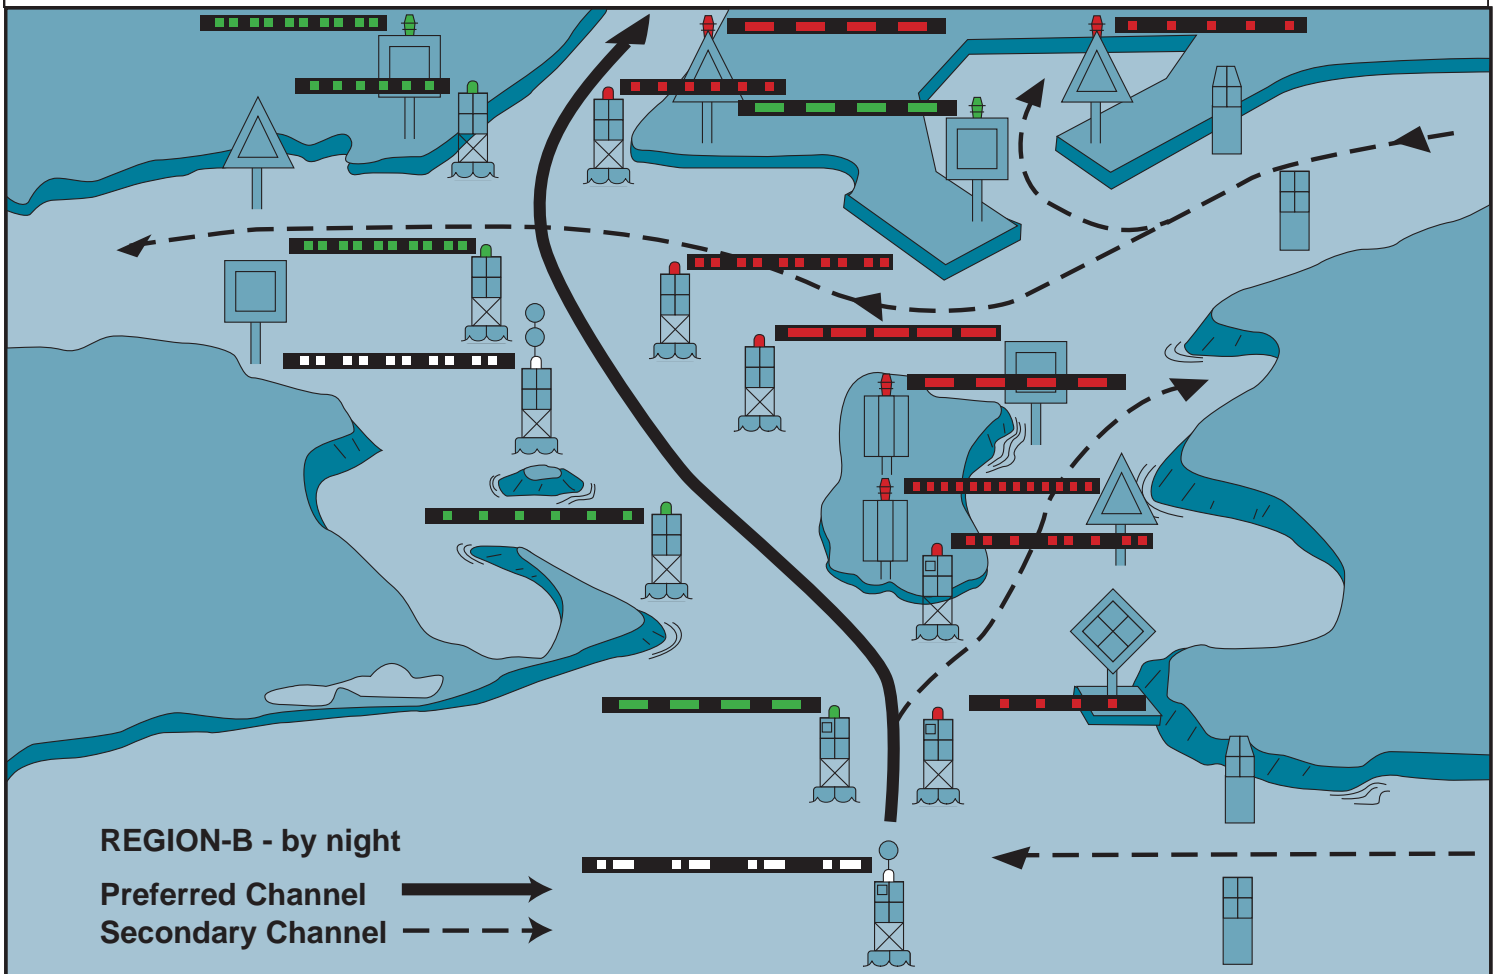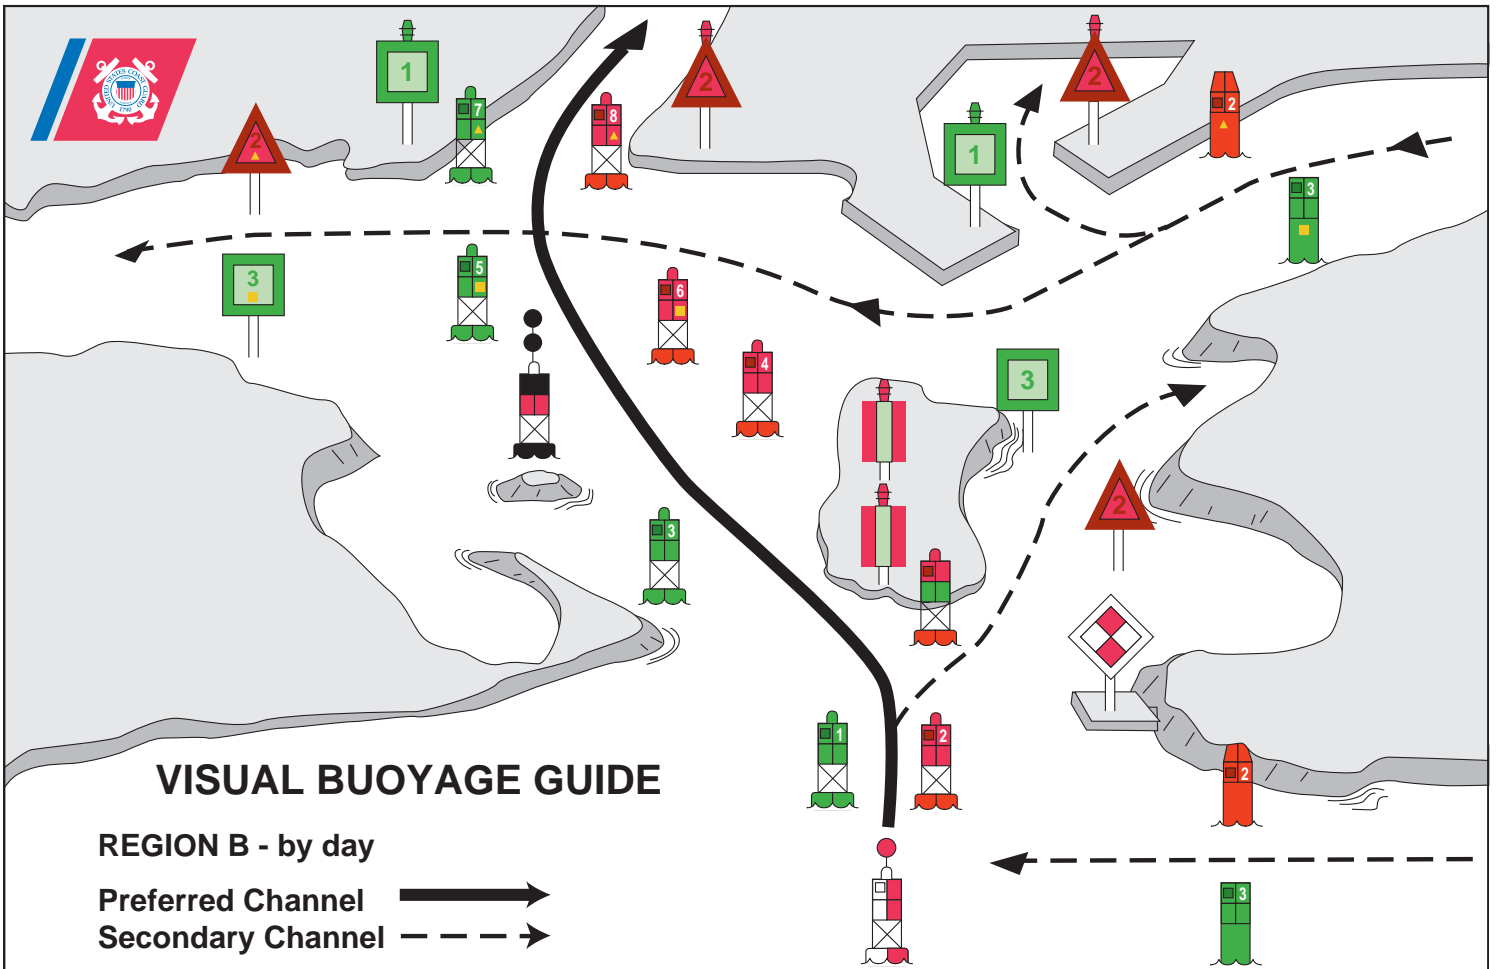



FICTITIOUS NAUTICAL CHART

